




DIMENSIONS

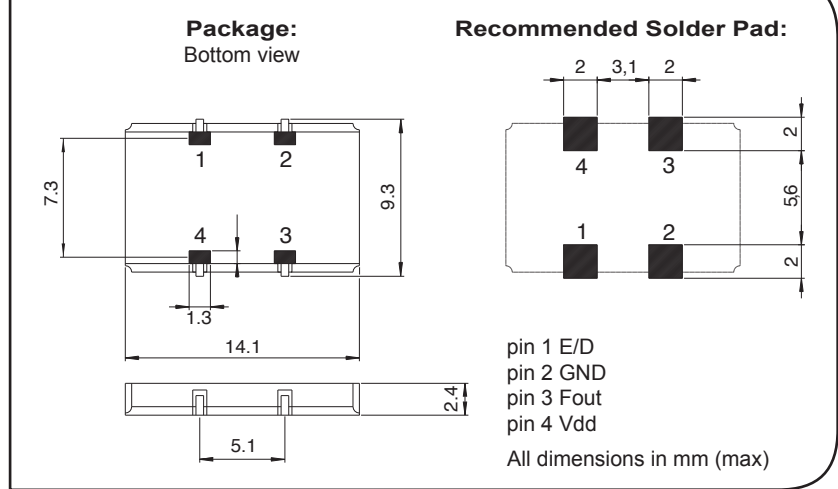

SMT Clock oscillator in ceramic package
Fundamental quartz mode frequency
High shock and vibration resistance
Wide temperature range
Low aging
Ultra low MSL
Very fast start-up
Swiss made quality
Customer specification on request

DESCRIPTION:

This SMD oscillator in ceramic package has been specially designed for surface mount using infrared, vapor phase or epoxy techniques.

APPLICATIONS:

- Avionics
- Airbone equipments
- Remote control
- Security application
- Radio Transceiver
- Microprocessor clocks

The MCSO's are supplied on trays (50 pcs / tray)
 For pick-and-place equipment, the parts are available in 24mm tapes with 250 parts min
 500 parts max

ELECTRICAL CHARACTERISTICS AT +25°C

Frequency stability Over temperature range (see ordering info) Including: adjustment at +25°C long term aging 10 years over supply voltage ±5% over load min to max	$\Delta F/F$	$\leq \pm 100$	ppm
Frequency stability version T Over temperature range (see ordering info) Including: adjustment at +25°C long term aging 1 year over supply voltage ±5% over load min to max	$\Delta F/F$	$\leq \pm 50$	ppm
Supply voltage ± 5%	1)*	Vdd	2.5 / 3.3 / 5 V
Input current		Idd	see table 1
Output signal			HC-MOS compatible
Symmetry at Vdd/2			40 / 60 %
Rise & fall time ≤ 20MHz (load 15pf 20% to 80%)			≤7 ns
Rise & fall time ≥ 20MHz (load 15pf 10% to 90%)			≤3 ns
Level "0" & "1"			<0.4>Vdd-0.5 V
Start-up time (typ/max)	t		1/5 ms
Load min / max			3/47 pF

* 1) C = 47nF ceramic must be connected between GND & Vdd

